



fspusafallprotection.com | (P) 704-262-7893 | (F) 704-262-9051
322 Industrial Court, Concord, NC 28025


TECHNICAL DATA SHEET

SAFELINK

FS-EX2517

SafeLink Intermediate Anchorage Post and Base

LIFELINE SPAN	REQUIRED CLEARANCE
15 ft	7'0"
20 ft	7'0"
25 ft	7'0"
30 ft	7'0"
35 ft	7'9"
40 ft	8'5"
45 ft	9'2"
50 ft	9'11"
55 ft	10'6"
60 ft	10'10"
65 ft	11'10"

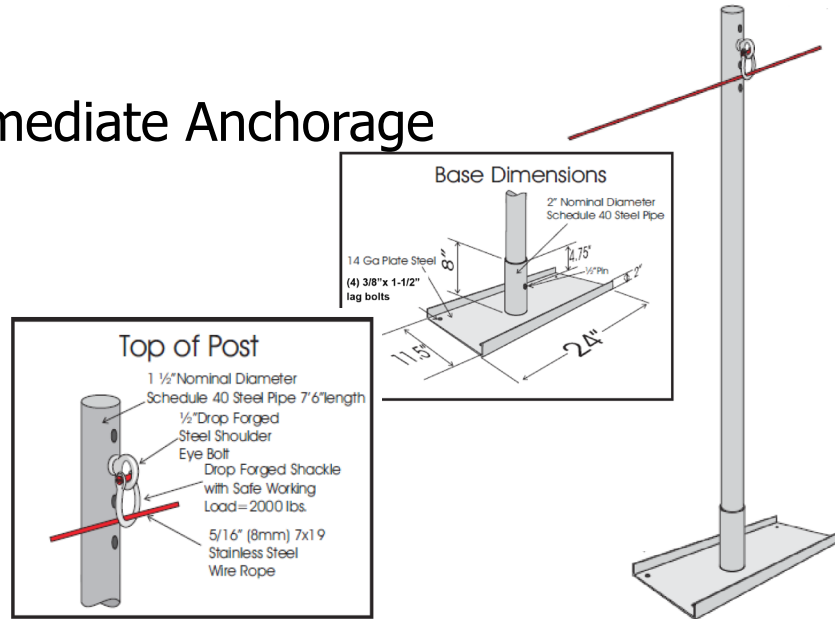

Description

Intermediate Anchor Base and Post for use with the SafeLink Horizontal Lifeline System. Used when horizontal spans exceed 65 feet or to accommodate low clear story height work. Temporary intermediate anchorage posts are only permitted for use in beam soffit conditions and the system limits the number of users to one.

To be secured to the soffit with four (4) 3/8" X 1-1/2" lag bolts. A minimum of two (2) lag bolts must be installed into the runner beneath. Only one user may be tied off to this system at a time.

See SafeLink User Manual for installation instructions

Length Base - 24 in (609.6 mm)

Height Base - 8 in (203.2 mm); Pole - 78 in (1.98 m)

Width Base - 11.5 in (292.1 mm); Pole - 2 in Dia (50.8 mm)

Material Stamped forged steel base and post; Drop-forged eye bolt and shackle

Working Load 310 lbs (140.61 kg)

Minimum Tensile Strength 5,000 lbs (2267.96 kg)

Weight 25 lbs (11.34 kg)

Applicable Standards Meets OSHA 1926-502, ANSI Z359.1-2007, ANSI A10.32 2012