




[fspusafallprotection.com](http://fspusafallprotection.com) | (P) 704-262-7893 | (F) 704-262-9051  
322 Industrial Court, Concord, NC 28025



## V-LINE FS88566-E

6' Dual-Leg Shock Lanyard w/ Rebar Hooks

## TECHNICAL DATA SHEET

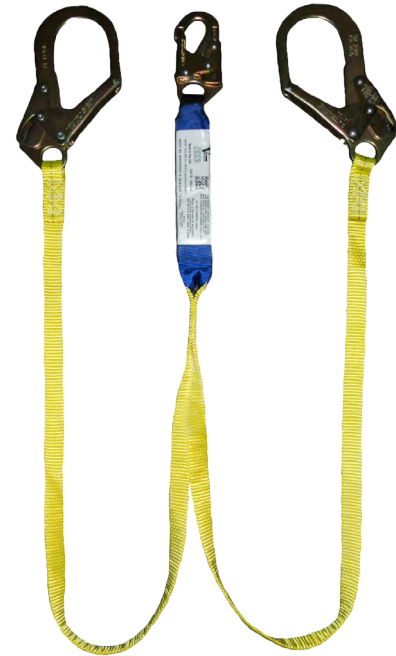

|                              |  |
|------------------------------|--|
| <b>Features and Benefits</b> | Fall arrest lanyard with two rebar hooks (connect to anchor points) and one snap hook (connects to harness dorsal D-ring). Shock absorber tear webbing limits dangerous fall arrest forces to maximum 1,300 lbs (589.67 kg). |
| <b>Length</b>                | 6 ft (1.83 m)  |
| <b>Weight</b>                | 7.5 lbs (3.40 kg)  |
| <b>Weight Capacity</b>       | 310 lbs (140.61 kg)  |
| <b>Attachment Point(s)</b>   | 1 Snap hooks - 2 Rebar hooks   |
| <b>Materials</b>             | 1 in (44.45 mm) Polyester webbing<br>Polyester stitching grade 10<br>Shock absorber<br>Forged steel snap hook and two (2) rebar hooks, each:<br>3,600 lbs Gate-rated; Min breaking strength > 5,000 lbs                      |
| <b>Applicable Standards</b>  | Meets OSHA 1926-502 - ANSI Z359.13-2009 - ANSI A10.32 2012   |